


VC0603K300R017

VC, Varistors, Low Voltage, 22 V, 17 VAC, 27 V, 44 V, 1 A, 30 A, 300 mJ, 3000 uW

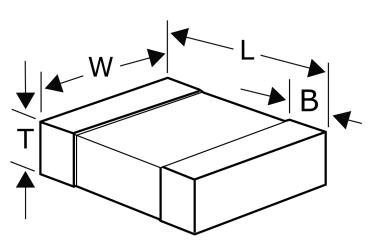

Click here for the 3D model.

Dimensions	,
Chip Size	0603
L	1.6mm +/-0.2mm
W	0.8mm +/-0.1mm
Т	0.95mm MAX
В	0.5mm +/-0.25mm

Packaging Specifications	
Packaging	T&R
Packaging Quantity	3500

General Information		
Series	VC	
Туре	Varistors	
Style	SMD Chip	
Description	Surface Mount Varistors	
Features	Low Voltage	
Termination	Nickel Tin	
RoHS	Yes	
Qualifications	IEC, UL, AEC-Q200	
AEC-Q200	Yes	

Specifications	
Voltage DC	22 VDC (25C)
Voltage AC	17 VAC
Temperature Range	-55/+125°C
Storage Temperature Range	-55/+150°C
Varistor Voltage	27 VDC at 1 mA
Clamping Voltage	44 V
Clamping Current	1A (8/20 us MAX)
Surge Current	30 A (8/20 us MAX)
Energy	0.3 J (10/1000 us MAX)
Capacitance	185 pF (1kHz)

Statements of suitability for certain applications are based on our knowledge of typical operating conditions for such applications, but are not intended to constitute - and we specifically disclaim - any warranty concerning suitability for a specific customer application or use. This Information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by us with reference to the use of our products is given gratis, and we assume no obligation or liability for the advice given or results obtained.