

Offering the global standard in safety.  
Meeting our customers' every need  
with numerous variations.

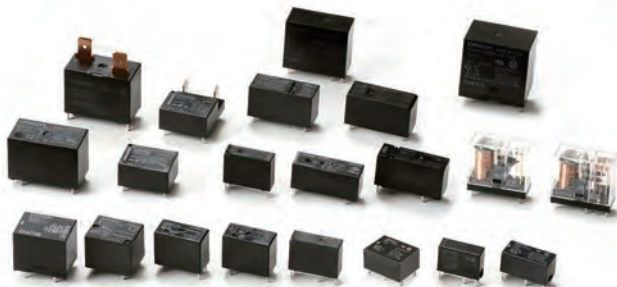
# Electrical Mechanical Relay

## *Selection Guide*

**Signal Relay**



**Power Relay**



**PCB Relay**

# PCB Relay Types

We largely divide relays based on the maximum switching current value.

## Signal Relay

Relays with less than 2 A maximum switching current value

## Power Relay

Relays larger than 2 A maximum switching current value

# Type Selection List (Best Selection)

## Signal Relay

Item		G5V-1	G5V-2	G6E	G6A	G6S	G6J-Y	G6K	G6K-RF (-S,-T)	G6K-RF-V
Contact form	1c	○		○						
	2c		○		○	○	○	○	○	○
Switching current (Max value)	1 A	○					○	○	○	○
	2 A		○		○	○				
	3 A			○						
Latching function	1-coil latching relay			○	○	○	○	○	○	
	2-coil latching relay			○	○	○				
Enclosure rating	Sealed	○	○	○	○	○	○	○	○	○
	Flux protection									
Terminal rating	PCB terminal	○	○	○	○	○	○	○	○	○
	Surface-mounting Terminals					○	○	○	○	○






## Power Relay

Item		G6DN	G5NB (-EL)	G5Q(-EL/-EL2/-EL3)	G6D	G6B	G6RN	G6RL	G5LE	G5CA	G6C
Contact form	1a	○	○	○	○	○	○	○	○	○	○
	1c			○			○	○	○		
	1a1b					○					○
	2a					○					
	2b					○					
Switching current (Max value)	3 A		○								
	5 A	○			○	○					
	7 A		○								
	8 A					○	○	○			○
	10 A			○				○	○	○	○
Latching function	1-coil latching relay					○					○
	2-coil latching relay					○					○
Enclosure rating	Sealed	○	○	○	○	○	○	○	○	○	○
	Flux protection		○	○	○	○	○	○	○	○	○
Terminal rating	PCB terminal	○	○	○	○	○	○	○	○	○	○
	Tab terminal									○	





Item		G4W	G4A	G2RL	G5RL	G5RL -U/-K	G2RG	G2R	G7L	G7L -PV	G7L -X
Contact form	1a	○	○	○	○	○		○	○		
	1c			○	○	○		○			
	1a1b										
	2a	○		○			○	○	○	○	○
	2c			○				○			
Switching current (Max value)	4 A							○			
	5 A			○	○ (N.C.)	○ (N.C.)		○			
	8 A						○	○			
	10 A	○		○				○			
	12 A				○ (N.O.)						
	15 A	○									
	16 A			○	○ (N.O.)	○ (N.O.)		○			
	20 A		○						○		○
Latching function	1-coil latching relay					○					
	2-coil latching relay					○		○			
Enclosure rating	Sealed			○			○	○			
	Flux protection		○	○	○	○		○			○
	Enclosed	○							○	○	
Terminal rating	PCB terminal	○	○	○	○	○	○	○	○	○	○
	Tab terminal		○					○	○		
	Screw terminal							○	○		

# Introduction of Main Types








## Signal Relay

Model	G6S	G6J-Y	G6K	G6K(U)-2F(P)-RF(-S,-T)	G6K-2F-RF-V
Features	Small general purpose relay High dielectric strength, high current	Ultra-small slim relay High density application possible	Ultra-small low profile relay Low power consumption	1 GHz/3 GHz range Ultra-small high frequency relay	8-GHz Band High Frequency Relay for Differential Transmission
Shape					
Contact form	2c	2c	2c	2c	2c
Max. switching current	2 A	1 A	1 A	1 A	1 A
Coil power consumption	Approx. 140 to 200 mW	Approx. 140 to 230 mW	Approx. 100 mW	Approx. 100 mW	Approx. 100 mW
Dielectric strength (Between coil and contacts)	2,000 VAC (Impulse withstand voltage: 2.5 kV)	1,500 VAC (Impulse withstand voltage: 2.5 kV)	1,500 VAC (Impulse withstand voltage: 2.5 kV)	750 VAC	AC350V













## Power Relay

Model	G6DN	G5NB(-EL)	G5Q(-EL/-EL2/-EL3)	G2RL
Features	Small, slim power relay with 1-pole 5 A switching	Small general purpose relay with 1-pole switching at 7 A max	Small power relay with 1-pole 10 A switching	Low profile power relay with 1-pole 10 A/16 A throw/2-pole 5 A switching
Shape				
Contact form	1a	1a	1a, 1c	1a, 1c, 2a, 2c
Max. switching current	5 A	AC: 7 A, DC: 5 A (-EL) 3 A (standard type)	10 A	10 A/16 A (1a, 1c) 5 A (2a, 2c)
Coil power consumption	Approx. 110 mW	Approx. 200 mW	Approx. 200 mW Approx. 400 mW	5 to 24 VDC: Approx. 400 mW 48 VDC: Approx. 430 mW
Dielectric strength (Between coil and contacts)	3,000 VAC (Impulse withstand voltage: 6 kV)	4,000 VAC (Impulse withstand voltage: 10 kV)	4,000 VAC (Impulse withstand voltage: 8 kV)	5,000 VAC (Impulse withstand voltage: 10 kV)










## Applicable socket list

Model	G6B			G6C		G6D	G7L
Contact form	1a		1a1b, 2a, 2b	1a, 1a1b		1a	1a, 2a
Applicable socket	P6B-04P	P6B-06P (2-coil latching relay)	P6B-26P	P6C-06P	P6C-08P (2-coil latching relay)	P6D-04P	P7LF-06
Shape							

# Signal Relay Product Lineup INDEX

Model	G5V-1	G5V-2	G6A	G6E	
Outer shape					
Shape (max. value mm) Length (L) x Width (w) x Height (H)	12.5 x 7.5 x 10	20.5 x 10.1 x 11.5	20.2 x 10.1 x 8.4	16 x 10 x 8	
Features	General purpose low-cost 1-pole signal relay	General purpose low-cost 2-pole signal relay	FCC-standard high-voltage type	Small, high sensitivity 1-pole signal relay	
Contact	Contact form	1c	2c	1c	
	Contact type	Crossbar single	Crossbar twin	Crossbar twin	
	Rated load	Resistive load	100,000 operations min. at 125 VAC, 0.5 A 100,000 operations min. at 24 VDC, 1 A	100,000 operations min. at 125 VAC, 0.5 A 100,000 operations min. at 30 VDC, 2 A (Standard type)	500,000 operations min. at 125 VAC, 0.5 A 500,000 operations min. at 30 VDC, 2 A
		Inductive load COSφ=0.4 L/R=7 ms	—	—	500,000 operations min. at 125 VAC, 0.3 A 500,000 operations min. at 30 VDC, 1 A
	Max. switching current (A)	1 A	2 A	2 A	3 A
Failure rate (mA) P level (reference value)	5 VDC 1 mA	10 mVDC 10 μA	10 mVDC 10 μA	10 mVDC 10 μA	
Coil	Rated voltage	3 to 24 VDC	3 to 48 VDC	3 to 48 VDC	
	Rated power consumption	Approx. 150 mW	Standard type: Approx. 500 to 580 mW High sensitivity type: Approx. 150 to 300 mW	Standard type: Approx. 200 to 235 mW Low-sensitivity type: Approx. 400 mW High sensitivity type: Approx. 150 mW	Approx. 200 to 400 mW
Mechanical endurance	5,000,000 operations min.	15,000,000 operations min.	100,000,000 operations min.	100,000,000 operations min.	
Dielectric strength	Between coil and contacts	1,000 VAC (Impulse withstand voltage 1.5 kV FCC part 68 standard)	1,000 VAC (Impulse withstand voltage 1.5 kV FCC part 68 standard)	1,000 VAC (Impulse withstand voltage 1.5 kV FCC part 68 standard)	
	Between contacts of different polarity	—	1,000 VAC (Impulse withstand voltage: 1.5 kV)	1,000 VAC	
	Between contacts of the same polarity	400 VAC	750 VAC (Standard type) 500 VAC (High sensitivity type) (Impulse withstand voltage: 1.5 kV)	1,000 VAC	1,000 VAC (Impulse withstand voltage 1.5 kV FCC part 68 standard)
	Between set/reset coil	—	—	250 VAC	—
Ambient operating temperature	-40°C to 70°C (Standard type) -40°C to 90°C (G5V-1-T90)	-25°C to 65°C (High sensitivity between -25 and 70°C)	-40°C to 70°C	-40°C to 70°C	
Functions	2-coil latching relay	—	●	●	
	1-coil latching relay	—	●	●	
	Other	—	—	—	Ultrasonically cleanable
Enclosure rating	Enclosed	—	—	—	
	Flux protection	—	—	—	
	Sealed	●	●	●	●
Terminal	PCB terminal	●	●	●	
	Surface-mounting Terminals	—	—	—	
	Tab terminal	—	—	—	
Approved standards	UL, CSA	UL, CSA	UL, C-UL	UL, CSA	
Minimum packing unit	25 pcs/tube	25 pcs/tube	25 pcs/tube	25 pcs/tube	
Weight	Approx. 2 g	Approx. 5 g	Approx. 3.5 g	Approx. 2.7 g	
PCB diagram (Unit: mm)	G5V-1 	G5V-2 	G6A-274P 	G6E-134P-US G6E-134PL-US 	
	(BOTTOM VIEW)	(BOTTOM VIEW)	(BOTTOM VIEW)	(BOTTOM VIEW)	
Terminal array diagram/ internal connection diagram	G5V-1 	G5V-2 	G6A-274P 	G6E-134P-US G6E-134PL-US 	
	(BOTTOM VIEW)	(BOTTOM VIEW)	(BOTTOM VIEW) (Take note of coil polarity)	(BOTTOM VIEW) (Take note of coil polarity)	

















# Signal Relay Product Lineup INDEX

Model		G6J-Y			
		G6J-2P-Y	G6J-2FS-Y	G6J-2FL-Y	
		PCB terminal	Surface-mounting terminal (short)	Surface-mounting terminal (long)	
Outer shape	Shape (max. value mm)				
	Length (L) x Width (w) x Height (H)	10.9 x 6 x 9.3	10.9 x 6 x 10	10.9 x 6 x 10	
Features					
		Ultra-small ultra-thin surface-mounting 2-pole signal relay			
Contact	Contact form	2c			
	Contact type	Crossbar twin			
	Rated load	Resistive load	100,000 operations min. at 125 VAC, 0.3 A 100,000 operations min. at 30 VDC, 1 A		
		Inductive load COSφ=0.4 L/R=7 ms	—		
	Max. switching current (A)	1 A			
Failure rate (mA) P level (reference value)	10 mVDC 10 μA				
Coil	Rated voltage	3 to 24 VDC			
	Rated power consumption	Approx. 140 to 230 mW			
Mechanical endurance		50,000,000 operations min.			
Dielectric strength	Between coil and contacts	1,500 VAC (Impulse withstand voltage 2.5 kV Telcordia standard) (Impulse withstand voltage 1.5 kV FCC part 68 standard)			
	Between contacts of different polarity	1,000 VAC (Impulse withstand voltage 1.5 kV FCC part 68 standard)			
	Between contacts of the same polarity	750 VAC (Impulse withstand voltage 1.5 kV FCC part 68 standard)			
	Between set/reset coil	—			
Ambient operating temperature		-40°C to 85°C			
Functions	2-coil latching relay	—			
	1-coil latching relay	●			
	Other	—			
Enclosure rating	Enclosed	—			
	Flux protection	—			
	Sealed	●			
Terminal	PCB terminal	●	—		
	Surface-mounting Terminals	—	●		
	Tab terminal	—			
Approved standards		UL, C-UL			
Minimum packing unit		50 pcs/tube	50 pcs/tube, 400 pcs/relay		
Weight		Approx. 1.0 g			
PCB diagram	(Unit: mm)				
		(BOTTOM VIEW)	(TOP VIEW)	(TOP VIEW)	
Terminal array diagram/ internal connection diagram					
		(BOTTOM VIEW) (Take note of coil polarity)	(TOP VIEW) (Take note of coil polarity)	(TOP VIEW) (Take note of coil polarity)	










# Signal Relay Product Lineup INDEX

Model		G6K			
		G6K-2P-Y	G6K-2F-Y	G6K-2G-Y	
		PCB terminal	Outer L shape surface-mounting terminal	Inner L shape surface-mounting terminal	
Outer shape	Shape (max. value mm)				
	Length (L) x Width (w) x Height (H)	10.2 x 6.7 x 5.3	10.2 x 6.7 x 5.4	10.2 x 6.7 x 5.6	
Features		Ultra-small low power consumption Ultra-thin low profile surface-mounting 2-pole signal relay			
Contact	Contact form	2c			
	Contact type	Crossbar twin			
	Rated load	Resistive load	100,000 operations min. at 125 VAC, 0.3 A		
		Inductive load COSφ=0.4 L/R=7 ms	100,000 operations min. at 30 VDC, 1 A		
	Max. switching current (A)	1 A			
Failure rate (mA) P level (reference value)	10 mVDC 10 μA				
Coil	Rated voltage	3 to 24 VDC			
	Rated power consumption	Approx. 100 mW			
Mechanical endurance		50,000,000 operations min.			
Dielectric strength	Between coil and contacts	1,500 VAC (Impulse withstand voltage 2.5 kV Telcordia standard) (Impulse withstand voltage 1.5 kV FCC part 68 standard)			
	Between contacts of different polarity	1,000 VAC (Impulse withstand voltage 1.5 kV FCC part 68 standard)			
	Between contacts of the same polarity	750 VAC (Impulse withstand voltage 1.5 kV FCC part 68 standard)			
	Between set/reset coil	—			
Ambient operating temperature		-40°C to 70°C			
Functions	2-coil latching relay	—			
	1 coil latching relay	●			
	Other	—			
Enclosure rating	Enclosed	—			
	Flux protection	—			
	Sealed	●			
Terminal	PCB terminal	●	●	—	
	Surface-mounting Terminals	—	—	●	
	Tab terminal	—			
	Approved standards	UL, CSA			
Minimum packing unit		50 pcs/tube	50 pcs/tube, 900 pcs/relay		
Weight		Approx. 0.7 g			
PCB diagram		G6K-2P-Y	G6K-2F-Y	G6K-2G-Y	
	(Unit: mm)				
Terminal array diagram/ internal connection diagram		G6K-2P-Y	G6K-2F-Y	G6K-2G-Y	
		(BOTTOM VIEW) (Take note of coil polarity)	(TOP VIEW) (Take note of coil polarity)	(TOP VIEW) (Take note of coil polarity)	

# Signal Relay Product Lineup INDEX





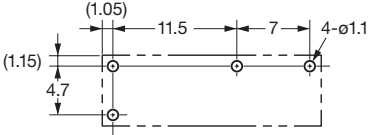


Model	G6K(U)-2(F/P)-RF(-S,-T)				G6K-2F-RF-V	
Outer shape Shape (max. value mm) Length (L) x Width (w) x Height (H)	G6K(U)-2F-RF	G6K(U)-2F-RF-S	G6K(U)-2F-RF-T	G6K-2P-RF	 <b>NEW</b>	
	 10.6 x 7.2 x 5.7	 11.0 x 7.2 x 5.7	 11.0 x 7.2 x 5.7	 13.6 x 7.2 x 5.5	 11.9 x 8.1 x 7.4	
Features	1 GHz range ultra-small high frequency relay	1 GHz range ultra-small high frequency relay (space-saving type)	3 GHz range ultra-small high frequency relay	Series of PCB terminals	High-speed Differential Transmission Signal Switching 8-GHz Band Miniature High Frequency Relay	
Characteristic resistance	50 Ω					
High frequency characteristics	Isolation (similar poles)	20 dB min. at 1 GHz	20 dB min. at 1 GHz 18 dB min. at 3 GHz	20 dB min. at 1 GHz	15 dB min. at 8 GHz	
	Isolation (different poles)	30 dB min. at 1 GHz	30 dB min. at 1 GHz 25 dB min. at 3 GHz	30 dB min. at 1 GHz	15 dB min. at 8 GHz	
	Insertion loss	0.2 dB max. at 1 GHz	0.2 dB max. at 1 GHz 0.6 dB max. at 3 GHz	0.2 dB max. at 1 GHz	Single-ended: 4 dB max. at 8GHz Differential transmission: 3 dB max. at 8GHz	
	Return loss	20.8 dB min. at 1 GHz	20.8 dB min. at 1 GHz 15.6 dB min. at 3 GHz	20.8 dB min. at 1 GHz	5 dB max. at 8GHz	
	V.SWR	1.2 max. at 1 GHz	1.2 max. at 1 GHz 1.4 max. at 3 GHz	1.2 max. at 1 GHz	3.57 max. at 8GHz	
Contact form	2c					
Contact type	Crossbar twin					
Contact	Rated load	100,000 operations min. at 125 VAC, 0.3 A 100,000 operations min. at 30 VDC, 1 A 100,000 operations min. at 1 GHz, 1 W			100,000 operations min. at 125 VAC, 0.3 A 100,000 operations min. at 30 VDC, 1 A 1,000,000 operations min. at 10 VDC, 10mA 100,000 operations min. at 8 GHz, 1 W	
	Inductive load	—				
	Max. switching current (A)	1 A				
Coil	Rated voltage	3 to 24 VDC			3 to 12 VDC	
	Rated power consumption	Approx. 100 mW				
Mechanical endurance	50,000,000 operations min.					
Dielectric strength	Between coil and contacts	750 VAC			AC350V	
	Between contacts of different polarity	750 VAC			AC350V	
	Between contacts of the same polarity	750 VAC			AC350V	
	Between coil, contact, and earth	500 VAC			AC350V	
Ambient operating temperature	-40°C to 70°C					
Functions	2-coil latching relay	—			—	
	1-coil latching relay	●	—		—	
	Other	—				
Enclosure rating	Enclosed	—				
	Flux protection	—				
	Sealed	●				
Terminal	PCB terminal	—			●	
	Surface-mounting Terminals	●	—		●	
	Tab terminal	—				
Approved standards	—					
Minimum packing unit	300 pcs/tray, 300, 900 pcs/relay			30 pcs/tube	40 pcs/tube	
Weight	Approx. 0.95 g			Approx. 1.16g	Approx. 1.16g	
PCB diagram (Unit: mm)	 (TOP VIEW)	 (TOP VIEW)	 (TOP VIEW)	 (BOTTOM VIEW)	 (TOP VIEW)	
	 (TOP VIEW) (Take note of coil polarity)	 (TOP VIEW) (Take note of coil polarity)	 (TOP VIEW) (Take note of coil polarity)	 (BOTTOM VIEW) (Take note of coil polarity)	 (TOP VIEW) (Take note of coil polarity)	

# Signal Relay Product Lineup INDEX











Model	G6S			
	G6S-2	G6S-2F	G6S-2G	
	PCB terminal	Outer L shape surface-mounting terminal	Inner L shape surface-mounting terminal	
Outer shape				
Shape (max. value mm) Length (L) x Width (w) x Height (H)	15 x 7.5 x 9.4	15 x 7.5 x 9.4	15 x 7.5 x 9.4	
Features	Small general purpose high dielectric strength, high current surface-mounting 2-pole signal relay			
Contact	Contact form	2c		
	Contact type	Crossbar twin		
	Rated load	Resistive load	100,000 operations min. at 125 VAC, 0.5 A 100,000 operations min. at 30 VDC, 2 A	
		Inductive load COSφ=0.4 L/R=7 ms	—	
	Max. switching current (A)	2 A		
Failure rate (mA) P level (reference value)	10 mVDC 10 μA			
Coil	Rated voltage	3 to 24 VDC		
	Rated power consumption	Approx. 140 to 200 mW		
Mechanical endurance	100,000,000 operations min.			
Dielectric strength	Between coil and contacts	2,000 VAC (Impulse withstand voltage 2.5 kV Telcordia standard) (Impulse withstand voltage 1.5 kV FCC part 68 standard)		
	Between contacts of different polarity	1,500 VAC (Impulse withstand voltage 2.5 kV Telcordia standard) (Impulse withstand voltage 1.5 kV FCC part 68 standard)		
	Between contacts of the same polarity	1,000 VAC (Impulse withstand voltage 1.5 kV FCC part 68 standard)		
	Between set/reset coil	500 VAC		
Ambient operating temperature	-40°C to 85°C			
Functions	2-coil latching relay	●		
	1-coil latching relay	●		
	Other	—		
Enclosure rating	Enclosed	—		
	Flux protection	—		
	Sealed	●		
Terminal	PCB terminal	●	—	
	Surface-mounting Terminals	—	●	
	Tab terminal	—		
Approved standards	UL, CSA, EN/IEC (BSI certification -Y type)			
Minimum packing unit	50 pcs/tube	50 pcs/tube, 400 pcs/relay		
Weight	Approx. 2 g			
PCB diagram				
	(Unit: mm)			
Terminal array diagram/ internal connection diagram				
	(BOTTOM VIEW) (Take note of coil polarity)	(TOP VIEW) (Take note of coil polarity)	(TOP VIEW) (Take note of coil polarity)	














# Power Relay Product Lineup INDEX

Model	G6DN		G5NB			
			Standard type	-EL		
Outer shape						
Shape (max. value mm) Length (L) x Width (w) x Height (H)	20.0 x 5.08 x 12.5		20.5 x 7.2 x 15.3	20.5 x 7.2 x 15.3		
Features	Small, slim power relay with 1-pole 5 A switching		1-pole 3 A switching relay with impulse withstand voltage of 10 kV And EN61010 strengthened insulation	Small power relay with 1-pole 7 A switching and ignition resistance international-standard compatibility		
Contact	Contact form	1a		1a		
	Contact type	Crossbar twin		Single		
	Rated load	Resistive load	100,000 operations min. at 250 VAC, 3 A (Standard) 100,000 operations min. at 30 VDC, 3 A (Standard) 80,000 operations min. at 250 VAC, 5 A (Standard) 80,000 operations min. at 30 VDC, 5 A (Standard) 100,000 operations min. at 250 VAC, 5 A (High durability) 100,000 operations min. at 30 VDC, 5 A (High durability)		200,000 operations min. at 125 VAC, 3 A 200,000 operations min. at 30 VDC, 3 A	
			Inductive load COSφ=0.4 L/R=7 ms	100,000 operations min. at 250 VAC, 2 A (Standard) 100,000 operations min. at 30 VDC, 2 A (Standard) 200,000 operations min. at 250 VAC, 2 A (High durability) 200,000 operations min. at 30 VDC, 2 A (High durability)		—
				Capacitive load	—	
	Max. switching current (A)	5 A		3 A	AC: 7 A, DC: 5 A	
Failure rate (mA) P level (reference value)	0.1 VDC 0.1 mA		5 VDC 10 mA			
Coil	Rated voltage	4.5 to 24 VDC		5 to 24 VDC		
	Rated power consumption	Approx. 110 mW		Approx. 200 mW		
Mechanical endurance	20,000,000 operations min.		5,000,000 operations min.			
Dielectric strength	Between coil and contacts	3,000 VAC (Impulse withstand voltage: 6 kV)		4,000 VAC (Impulse withstand voltage: 10 kV)		
	Between contacts of different polarity	—		—		
	Between contacts of the same polarity	750 VAC		750 VAC		
	Between set/reset coil	—		—		
Ambient operating temperature	-40°C to 90°C		-40°C to 70°C	-40°C to 85°C		
Functions	2-coil latching relay	—		—		
	1-coil latching relay	—		—		
	Other	—		—		
Enclosure rating	Enclosed	—		—		
	Flux protection	—		—		
	Sealed	●	●	●		
Terminal	PCB terminal	●	●	●		
	Surface-mounting Terminals	—		—		
	Tab terminal	—		—		
	Screw terminal	—		—		
Approved standards	UL, C-UL, EN/IEC (VDE certification)		UL, CSA, EN/IEC (VDE certification)			
Minimum packing unit	25 pcs/tube		100 pcs/tray			
Weight	Approx. 3 g		Approx. 4 g			
PCB diagram	G6DN-1A		G5NB-1A/G5NB-1A4-EL-HA			
	 <p>(Unit: mm)</p> <p>(BOTTOM VIEW)</p>		 <p>(BOTTOM VIEW)</p>			
Terminal array diagram/ internal connection diagram	G6DN-1A		G5NB-1A/G5NB-1A4-EL-HA			
	 <p>(BOTTOM VIEW)</p>		 <p>(BOTTOM VIEW)</p>			





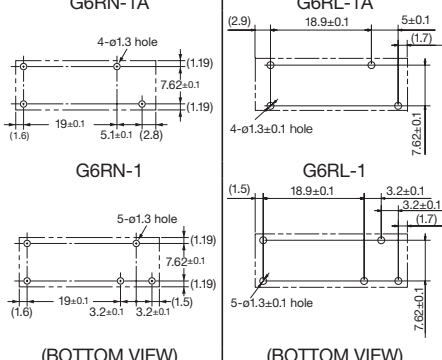
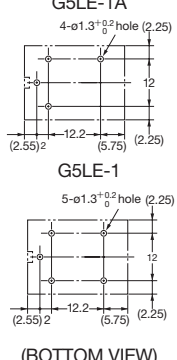






# Power Relay Product Lineup INDEX

Model		G5Q					
		Standard type	-EL	-EL2	-EL3		
Outer shape	Shape (max. value mm)						
	Length (L) x Width (w) x Height (H)	20.3 x 10.3 x 15.8	20.3 x 10.3 x 15.8	20.3 x 10.3 x 15.8	20.3 x 10.3 x 15.8		
Features		Small power relay with 1-pole 10 A switching		10 A (250 VAC) high switching capacity with over 100,000 operations and long operating life, with ignition resistance international-standard compatibility	Switching at 40 A inrush current through inrush-current resistance, with ignition resistance international-standard compatibility	30 A inrush current and 3 A breaking current motor load switching, with ignition resistance international-standard compatibility	
Contact	Contact form	1a	1c	1a			
	Contact type	Single					
	Rated load	Resistive load	50,000 operations min. at 125 VAC 10 A (N.O.) 200,000 operations min. at 125 VAC 3 A (N.O.) 50,000 operations min. at 250 VAC 5 A (N.O.) 100,000 operations min. at 250 VAC 3 A (N.O.) 100,000 operations min. at 30 VDC 5 A (N.O.)	200,000 operations min. at 125 VAC 3 A (N.C.) 100,000 operations min. at 250 VAC 3 A (N.C.) 100,000 operations min. at 30 VDC 3 A (N.C.)	100,000 operations min. at 250 VAC, 10 A	—	—
		Inductive load COSφ=0.4 L/R=7 ms	—	—	—	—	Motor load 250 VAC, Inrush: 30 A/0.5 s, Breaking: 3 A cosφ=0.5, 300,000 operations min.
		Capacitive load	—	—	—	250 VAC, Inrush: 40 A/100 μs, Breaking: 1 A, 100,000 operations min.	—
	Max. switching current (A)	10 A					
	Failure rate (mA) P level (reference value)	5 VDC 10 mA					
	Coil	Rated voltage	5 to 24 VDC				
		Rated power consumption	Approx. 200 mW		Approx. 400 mW		
	Mechanical endurance		10,000,000 operations min.				
Dielectric strength	Between coil and contacts	4,000 VAC (Impulse withstand voltage: 8 kV)					
	Between contacts of different polarity	—					
	Between contacts of the same polarity	1,000 VAC					
	Between set/reset coil	—					
Ambient operating temperature		-40°C to 85°C					
Functions	2-coil latching relay	—					
	1-coil latching relay	—					
	Other	—					
Enclosure rating	Enclosed	—					
	Flux protection	●	●	—	—		
	Sealed	●	—	●	●		
Terminal	PCB terminal	●					
	Surface-mounting Terminals	—					
	Tab terminal	—					
	Screw terminal	—					
Approved standards		UL, CSA, EN/IEC (VDE certification)					
Minimum packing unit		100 pcs/tray					
Weight		Approx. 6.5 g					
PCB diagram	(Unit: mm)						
		(BOTTOM VIEW)	(BOTTOM VIEW)	(BOTTOM VIEW)			
Terminal array diagram/ internal connection diagram							
		(BOTTOM VIEW)	(BOTTOM VIEW)	(BOTTOM VIEW)			











# Power Relay Product Lineup INDEX

Model	G6D		G6B			
Outer shape		1-pole		2-pole		
		Standard type	High capacity type	High reliability type	Standard type	
Shape (max. value mm) Length (L) x Width (w) x Height (H)	17.5 x 6.5 x 12.5	20 x 10 x 10	20.2 x 10 x 12.5	20 x 10 x 10	20 x 11 x 11	
Features	Small 5 A 1-pole power relay	Small 5 A (8 A) 1a contact power relay		High reliability by adopting Single crossbar contact	Small 5 A 1a1b, 2a, 2b contact power relay	
Contact	Contact form	1a		2c	1a1b, 2a, 2b	
	Contact type	Single		Crossbar single	Single	
	Rated load	Resistive load	70,000 operations min. at 250 VAC, 5 A 70,000 operations min. at 30 VDC, 5 A 300,000 operations min. at 250 VAC, 2 A 300,000 operations min. at 30 VDC, 2 A	100,000 operations min. at 250 VAC, 5 A 100,000 operations min. at 30 VDC, 5 A	100,000 operations min. at 250 VAC, 8 A 100,000 operations min. at 30 VDC, 8 A	100,000 operations min. at 250 VAC, 2 A 100,000 operations min. at 30 VDC, 2 A
			Inductive load COSφ=0.4 L/R=7 ms	—	100,000 operations min. at 250 VAC, 2 A 100,000 operations min. at 30 VDC, 2 A	100,000 operations min. at 250 VAC, 2 A 100,000 operations min. at 30 VDC, 2 A
	Max. switching current (A)	5 A	5 A	8 A	2A	5 A
Failure rate (mA) P level (reference value)	5 VDC 10 mA	5 VDC 10 mA		DC1V 1mA	5 VDC 10 mA	
Coil	Rated voltage	5 to 24 VDC		3 to 12 VDC	5 to 24 VDC	
	Rated power consumption	Approx. 200 mW	Approx. 200 mW		Approx. 100 mW	Approx. 300 mW
Mechanical endurance	20,000,000 operations min.	50,000,000 operations min.				
Dielectric strength	Between coil and contacts	3,000 VAC (impulse withstand voltage: 6 kV)	Single stable type: 3,000 VAC (impulse withstand voltage 6 kV) Latching type: 2,000 VAC (impulse withstand voltage 4.5 kV)		AC3,000V	
	Between contacts of different polarity	—	—		2,000 VAC	
	Between contacts of the same polarity	750 VAC	1,000 VAC		—	
	Between set/reset coil	—	250 VAC	—		
Ambient operating temperature	-25°C to 70°C		-25°C to 70°C			
Functions	2-coil latching relay	—	●	—		
	1-coil latching relay	—	●	—		
	Other	—		Ultrasonically cleanable	Ultrasonically cleanable	
Enclosure rating	Enclosed	—				
	Flux protection	—	—	● (G6B-1177P-ND)	—	
	Sealed	●	—		●	
Terminal	PCB terminal	●	—		●	
	Surface-mounting Terminals	—	—			
	Tab terminal	—	—			
	Screw terminal	—	—			
Approved standards	UL, CSA, EN/IEC (TÜV certification)	UL, CSA, EN/IEC (TÜV certification)		—	UL, CSA, EN/IEC (TÜV certification)	
Minimum packing unit	25 pcs/tube	100 pcs/tray	20 pcs/tube	100 pcs/tray		
Weight	Approx. 3 g	Approx. 3.5 g	Approx. 4.6 g	Approx. 3.5 g	Approx. 4.5 g	
PCB diagram	G6D-1A-ASI(-AP)	G6B-1114P-US	G6B-1174P-US	G6B-1184P-US	G6B-2114P-US G6B-2214P-US G6B-2014P-US	
	 (Unit: mm)					
Terminal array diagram/ internal connection diagram	G6D-1A-ASI(-AP)	G6B-1114P-US	G6B-1174P-US	G6B-1184P-US	G6B-2114P-US G6B-2214P-US G6B-2014P-US	
	 (BOTTOM VIEW) (Take note of coil polarity)	 (BOTTOM VIEW) (Take note of coil polarity)	 (BOTTOM VIEW) (Take note of coil polarity)	 (TOP VIEW) (Take note of coil polarity)	 (BOTTOM VIEW) (Take note of coil polarity)	



















# Power Relay Product Lineup INDEX

Model	G6RN	G6RL	G5LE	G5CA		
Outer shape				Standard type	High capacity type	
	Shape (max. value mm) Length (L) x Width (w) x Height (H)	28.5 x 10 x 15	28.5 x 10 x 12.3	22.5 x 16.5 x 19	 22 x 16 x 11	
Features	Small 1-pole power relay with 8 A switching and impulse withstand voltage of 10 kV	Low profile 1-pole power relay with 10 A switching and 12.3 mm height	10 A cubic type 1-pole power relay	Flat power relay with 10, 15 A switching		
Contact	Contact form	1a, 1c	1a, 1c	1a		
	Contact type	Single	Single	Single		
	Rated load	Resistive load	50,000 operations min. at 250 VAC, 8 A 50,000 operations min. at 30 VDC, 5 A	50,000 operations min. at 250 VAC, 8 A 50,000 operations min. at 24 VDC, 5 A	100,000 operations min. at 120 VAC, 10 A 100,000 operations min. at 30 VDC, 8 A	300,000 operations min. at 250 VAC, 10 A 100,000 operations min. at 30 VDC, 10 A
		Inductive load COSφ=0.4 L/R=7 ms	—	—	—	100,000 operations min. at 110 VAC, 15 A 100,000 operations min. at 30 VDC, 10 A
	Max. switching current (A)	8 A	10 A	10 A	10 A	15 A
	Failure rate (mA) P level (reference value)	5 VDC 10 mA	5 VDC 10 mA	5 VDC 100 mA	5 VDC 100 mA	
Coil	Rated voltage	5 to 24 VDC	3 to 48 VDC	5 to 24 VDC	5 to 24 VDC	
	Rated power consumption	Approx. 220 mW	Approx. 220 to 240 mW	Approx. 400 mW	Approx. 150 to 200 mW	
Mechanical endurance	10,000,000 operations min.	10,000,000 operations min.	10,000,000 operations min.	20,000,000 operations min.		
Dielectric strength	Between coil and contacts	4,000 VAC (Impulse withstand voltage: 10 kV)	5,000 VAC (Impulse withstand voltage: 10 kV)	2,000 VAC (Impulse withstand voltage: 4.5 kV)	2,500 VAC (Impulse withstand voltage: 4.5 kV)	
	Between contacts of different polarity	—	—	—	—	
	Between contacts of the same polarity	1,000 VAC	1,000 VAC	750 VAC	1,000 VAC	
	Between set/reset coil	—	—	—	—	
Ambient operating temperature	-40°C to 85°C	-40°C to 85°C	-25°C to 85°C	-25°C to 70°C		
Functions	2-coil latching relay	—	—	—		
	1-coil latching relay	—	—	—		
	Other	—	—	—		
Encasing	Enclosed	—	—	—		
	Flux protection	—	●	●	●	
	Sealed	●	●	●	●	
Terminal	PCB terminal	●	●	●	●	
	Surface-mounting Terminals	—	—	—	—	
	Tab terminal	—	—	—	—	
	Screw terminal	—	—	—	● (#187) TP type	
Approved standards	UL, CSA, EN/IEC (VDE certification)	UL, C-UL, EN/IEC (VDE certification)	UL, CSA, EN/IEC (VDE certification), EN/IEC (TÜV certification)	UL, CSA, EN (TÜV certification)		
Minimum packing unit	20 pcs/tube	100 pcs/tray	100 pcs/tray	20 pcs/tube		
Weight	Approx. 9 g	Approx. 7.8 g	Approx. 12 g	Approx. 8 g (TP type: approx. 9.6 g)		
PCB diagram						
	(Unit: mm)					
Terminal array diagram/ internal connection diagram						
	G6RN-1		G5LE-1	G5CA-1A(-E)		
	(BOTTOM VIEW)		(BOTTOM VIEW)	(BOTTOM VIEW)		
						
G6RL-1		G5LE-1				
(BOTTOM VIEW)		(BOTTOM VIEW)				













# Power Relay Product Lineup INDEX

Model	G6C		G4W		G4A	
Outer shape						
Shape (max. value mm) Length (L) x Width (w) x Height (H)	20 x 15 x 10		30.5 x 19.5 x 30.5	30.5 x 19.5 x 30.5	30.5 x 16 x 23.5	
Features	Small 1-pole 10 A (1a1b, 8 A) power relay		Impulse voltage 10 kV For switching with power source with 4 kV dielectric strength		Optimal for air conditioner compressor load and inverter load 1-pole power relay	
Contact	Contact form	1a	1a	2a	1a	
	Contact type	Single		Single		
	Rated load	Resistive load	100,000 operations min. at 250 VAC, 10 A 100,000 operations min. at 30 VDC, 10 A	100,000 operations min. at 250 VAC, 8 A 100,000 operations min. at 30 VDC, 8 A	100,000 operations min. at 250 VAC, 15 A 100,000 operations min. at 24 VAC, 15 A	100,000 operations min. at 250 VAC, 10 A 100,000 operations min. at 24 VAC, 10 A
		Inductive load COSφ=0.4 L/R=7 ms	100,000 operations min. at 250 VAC, 5 A 100,000 operations min. at 30 VDC, 5 A	100,000 operations min. at 250 VAC, 3.5 A 100,000 operations min. at 30 VDC, 3.5 A	100,000 operations min. at 250 VAC, 10 A 100,000 operations min. at 24 VDC, 7.5 A	100,000 operations min. at 250 VAC, 7.5 A 100,000 operations min. at 24 VDC, 5 A
	Max. switching current (A)	10 A	8 A	15 A	10 A	20 A
Failure rate (mA) P level (reference value)	5 VDC 10 mA		5 VDC 100 mA		5 VDC 100 mA	
Coil	Rated voltage	3 to 24 VDC		12 to 100 VDC		12 VDC, 24 VDC
	Rated power consumption	Approx. 200 mW		Approx. 800 mW		Approx. 900 mW
Mechanical endurance	50,000,000 operations min.		5,000,000 operations min.		2,000,000 operations min.	
Dielectric strength	Between coil and contacts	2,000 VAC (Impulse withstand voltage: 6 kV)		4,000 VAC (Impulse withstand voltage: 10 kV)		4,500 VAC (Impulse withstand voltage: 8.5 kV)
	Between contacts of different polarity	—	2,000 VAC	2,000 VAC		—
	Between contacts of the same polarity	1,000 VAC		1,500 VAC		1,000 VAC
	Between set/reset coil	250 VAC		—		—
Ambient operating temperature	-25°C to 70°C		-25°C to 55°C		-25°C to 60°C	
F functions	2-coil latching relay	●		—		—
	1-coil latching relay	●		—		—
	Other	Ultrasonically cleanable		Full wave rectification		—
Enclosure rating	Enclosed	—		●		—
	Flux protection	●		—		●
	Sealed	●		—		—
Terminal	PCB terminal	●		●		●
	Surface-mounting Terminals	—		—		—
	Tab terminal	—		—		●(#250)
	Screw terminal	—		—		—
Approved standards	UL, CSA, EN/IEC (VDE certification), EN/IEC (TÜV certification)		UL, CSA, EN/IEC (VDE certification), EN/IEC (TÜV certification)		UL, CSA, EN/IEC (VDE certification)	
Minimum packing unit	100 pcs/tray		50 pcs/tray		50 pcs/tray	
Weight	Approx. 5.6 g		Approx. 29 g		Approx. 23 g	
PCB diagram	G6C-1114P-US		G6C-2114P-US		G4A-1A-E	
						
	(BOTTOM VIEW)		(BOTTOM VIEW)		(BOTTOM VIEW)	
Terminal array diagram/ internal connection diagram	G6C-1114P-US		G6C-2114P-US		G4A-1A-E	
						
	(BOTTOM VIEW) (Take note of coil polarity)		(BOTTOM VIEW) (Take note of coil polarity)		(TOP VIEW) (BOTTOM VIEW)	














# Power Relay Product Lineup INDEX

Model		G2RL				
Outer shape		1-pole	1-pole (high capacity type)	1-Pole (TV-3 rating)	2-pole	
Shape (max. value mm) Length (L) x Width (w) x Height (H)		 29.0 x 12.7 x 15.7	 29.0 x 12.7 x 15.7	 29.0 x 12.7 x 15.7	 29.0 x 12.7 x 15.7	
Features		1-pole 10 A general purpose type	16 A high current type	TV-3 compatible type	2-pole 5 A general purpose type	
Contact	Contact form	1a, 1c		1a	2a, 2c	
	Contact type	Single				
	Rated load	Resistive load	50,000 operations min. at 250 VAC, 12 A 30,000 operations min. at 24 VDC, 12 A	G2RL-1(A)-E, G2RL-1A-E-ASI 30,000 operations min. at 250 VAC, 16 A 30,000 operations min. at 24 VDC, 16 A G2RL-1A-E-CV 50,000 operations min. at 250 VAC, 16 A at 105°C		30,000 operations min. at 250 VAC, 8 A 30,000 operations min. at 24 VDC, 8 A
		Inductive load COSφ=0.4 L/R=7 ms	—	—	—	—
	Max. switching current (A)	12 A	16 A		8 A	
Failure rate (mA) P level (reference value)	24 VDC 40 mA					
Coil	Rated voltage	5 to 48 VDC				
	Rated power consumption	5 to 24 VDC: Approx. 400 mW, 48 VDC: Approx. 430 mW				
Mechanical endurance		20,000,000 operations min.				
Dielectric strength	Between coil and contacts	5,000 VAC (Impulse withstand voltage: 10 kV)				
	Between contacts of different polarity	—		2,500 VAC		
	Between contacts of the same polarity	1,000 VAC				
	Between set/reset coil	—				
Ambient operating temperature		-40°C to 85°C, -40°C to 105°C (-CV type)				
Functions	2-coil latching relay	—				
	1-coil latching relay	—				
	Other	—				
Enclosure rating	Enclosed	—				
	Flux protection	●				
	Sealed	●				
Terminal	PCB terminal	●				
	Surface-mounting Terminals	—				
	Tab terminal	—				
	Screw terminal	—				
Approved standards		UL, CSA, EN/IEC (VDE certification)				
Minimum packing unit		20 pcs/tube				
Weight		Approx. 12 g				
PCB diagram	(Unit: mm)	 G2RL-1A	 G2RL-1A-E	 G2RL-1A-E-ASI	 G2RL-2A	
		 G2RL-1	 G2RL-1-E		 G2RL-2	
Terminal array diagram/ internal connection diagram		 G2RL-1A	 G2RL-1A-E	 G2RL-1A-E-ASI	 G2RL-2A	
		 G2RL-1	 G2RL-1-E		 G2RL-2	

# Power Relay Product Lineup INDEX








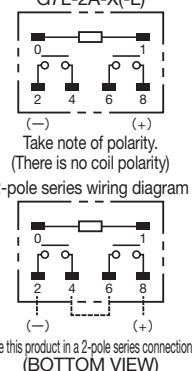
Model		G5RL			G5RL-U/-K		
		Standard (quiet)	High capacity (quiet)	High capacity (TV-8 rating)	1-coil latching relay	2-coil latching relay	
Outer shape	Shape (max. value mm)						
	Length (L) x Width (w) x Height (H)	29.0 x 12.7 x 15.7	29.0 x 12.7 x 15.7	29.0 x 12.7 x 15.7	29.0 x 12.7 x 15.7		
Features		Low profile power relay with a TV-8 rating and low noise			Small latching relay with low profile and 16 A switching		
Contact	Contact form	1a			1a, 1c		
	Contact type	Single			Single		
	Rated load	Resistive load	100,000 operations min. at 250 VAC, 12 A 100,000 operations min. at 24 VDC, 12 A	50,000 operations min. at 250 VAC, 16 A 50,000 operations min. at 24 VDC, 16 A		50,000 operations min. at 250 VAC 16 A (N.O.) 50,000 operations min. at 250 VAC 5 A (N.C.) 50,000 operations min. at 24 VDC 16 A (N.O.) 50,000 operations min. at 24 VDC 5 A (N.C.)	
		Inductive load COSφ=0.4 L/R=7 ms	—			—	
	Max. switching current (A)	12 A	16 A		16 A (N.O.), 5 A (N.C.)		
Failure rate (mA) P level (reference value)	5 VDC 100 mA			—			
Coil	Rated voltage	5 to 24 VDC		5 to 48 VDC	3 to 24 VDC	5 to 24 VDC	
	Rated power consumption	Approx. 530 mW		Approx. 400 mW (Approx. 430 mW with 48 VDC only)	Approx. 600 mW	Approx. 750 mW (Approx. 840 mW with 24 VDC only)	
Mechanical endurance		1,000,000 operations min.		10,000,000 operations min.	5,000,000 operations min.		
Dielectric strength	Between coil and contacts	6,000 VAC (Impulse withstand voltage: 10 kV)			6,000 VAC (Impulse withstand voltage: 10 kV)		
	Between contacts of different polarity	—			—		
	Between contacts of the same polarity	1,000 VAC			1,000 VAC		
	Between set/reset coil	—			—		
Ambient operating temperature		-40°C to 85°C			-40°C to 85°C		
Functions	2-coil latching relay	—			—	●	
	1-coil latching relay	—			●	—	
	Other	—			—	—	
Enclosure rating	Enclosed	—			—	—	
	Flux protection	●			—	●	
	Sealed	—			—	—	
Terminal	PCB terminal	●			—	●	
	Surface-mounting Terminals	—			—	—	
	Tab terminal	—			—	—	
	Screw terminal	—			—	—	
Approved standards		UL, C-UL, EN/IEC (VDE certification)		UL, CSA, EN/IEC (VDE certification)	UL, CSA, EN/IEC (VDE certification)		
Minimum packing unit		100 pcs/tray			100 pcs/tray		
Weight		Approx. 10 g			Approx. 10 g		
PCB diagram	(Unit: mm)						
		(BOTTOM VIEW)	(BOTTOM VIEW)		(BOTTOM VIEW)	(BOTTOM VIEW)	
Terminal array diagram/ internal connection diagram					 Note: Take note of coil polarity.	 Note: Take note of coil polarity.	
		(BOTTOM VIEW)	(BOTTOM VIEW)		(BOTTOM VIEW)	(BOTTOM VIEW)	

# Power Relay Product Lineup INDEX

Model	G2RG		G2R			
Outer shape	 Shape (max. value mm) Length (L) x Width (w) x Height (H) 29.0 x 13.5 x 25.5	1-pole	1-pole (high capacity type)	2-pole		
		 29 x 13 x 25.5	 29 x 13 x 25.5			
Features	Small power relay with high voltage 5 A switching at 110 VDC (1a contact with 2-pole series wiring at 1.5 mm)	1-pole 10 A general purpose type	16 A high capacity type	2-pole 5 A general purpose type		
Contact	Contact form	2a		1a, 1c		
	Contact type	Single				
	Rated load	Resistive load	10,000 operations min. at 250 VAC 8 A 10,000 operations min. at 110 VDC 5 A (with 2-pole series wiring)	100,000 operations min. at 250 VAC, 10 A 100,000 operations min. at 30 VDC, 10 A (Flux protection)	100,000 operations min. at 250 VAC, 16 A 100,000 operations min. at 30 VDC, 16 A	100,000 operations min. at 250 VAC, 5 A 100,000 operations min. at 30 VDC, 5 A (Flux protection)
		Inductive load COSφ=0.4 L/R=7 ms	—	100,000 operations min. at 250 VAC, 7.5 A 100,000 operations min. at 30 VDC, 5 A (Flux protection)	100,000 operations min. at 250 VAC, 8 A 100,000 operations min. at 30 VDC, 8 A	100,000 operations min. at 250 VAC, 2 A 100,000 operations min. at 30 VDC, 3 A (Flux protection)
	Max. switching current (A)	8 A	10 A (Flux protection) 8 A (Sealed)	16 A	5 A (Flux protection) 4 A (Sealed)	
	Failure rate (mA) P level (reference value)	5 VDC 10 mA	5 VDC 100 mA		5 VDC 10 mA	
Coil	Rated voltage	12 VDC, 24 VDC				
	Rated power consumption	Approx. 800 mW	5 to 100 VDC, 12 to 200 VAC DC: Approx. 530 mW, AC: Approx. 900 mVA			
Mechanical endurance	1,000,000 operations min.	DC coil specifications: 20,000,000 operations min., AC coil specifications: 10,000,000 operations min.				
Dielectric strength	Between coil and contacts	5,000 VAC (Impulse withstand voltage: 10 kV)	5,000 VAC (Impulse withstand voltage: 10 kV)			
	Between contacts of different polarity	3,000 VAC	—		3,000 VAC	
	Between contacts of the same polarity	1,000 VAC	1,000 VAC			
	Between set/reset coil	—	1,000 VAC	—		
Ambient operating temperature	-40°C to 70°C	-40°C to 70°C				
Functions	2-coil latching relay	—	●	—	●	
	1-coil latching relay	—	—	—	—	
	Other	—	Ultrasonically cleanable, full wave rectification (excluding high current type)			
Encapsulating	Enclosed	—	● (Tab terminal)	—	—	
	Flux protection	—	—	●	—	
	Sealed	●	●	—	●	
Terminal	PCB terminal	●	—	●	—	
	Surface-mounting Terminals	—	—	—	—	
	Tab terminal	—	● (#187)	—	—	
	Screw terminal	—	—	—	—	
Approved standards	UL, CSA, EN/IEC (VDE certification)	UL, CSA, EN/IEC (VDE certification), EN (TUV certification)				
Minimum packing unit	50 pcs/tray	50 pcs/tray (100 pcs/tray for tab terminal)				
Weight	Approx. 17.2 g	Approx. 17 g (Approx. 20 g for tab terminal)				
PCB diagram	G2RG-2A4	G2RL-1A	G2R-1A-E	G2R-2A		
	 (Unit: mm)	 (BOTTOM VIEW)	 (BOTTOM VIEW)	 (BOTTOM VIEW)	 (BOTTOM VIEW)	
Terminal array diagram/ internal connection diagram	G2RG-2A4	G2RL-1A	G2R-1A-E	G2R-2A		
	 (BOTTOM VIEW)	 (BOTTOM VIEW)	 (BOTTOM VIEW)	 (BOTTOM VIEW)	 (BOTTOM VIEW)	



# Power Relay Product Lineup INDEX

Model		G7L				G7L-PV	G7L-X (standard) G7L-X-L (general purpose)		
Outer shape	Shape (max. value mm)	52.5 x 35.5 x 41 (PCB terminal)				52.5 x 35.5 x 41	52.5 x 35.5 x 41		
	Length (L) x Width (w) x Height (H)								
Features		<ul style="list-style-type: none"> <li>Multi polar power relay, strong against sudden drops in voltage</li> <li>Wide range with 100 V and 200 V coils</li> </ul>				Solar system Relay for PV inverter	600 to 1,000 VDC isolation/switching thanks to 2-pole series wiring		
Contact	Contact form	1a (-T□, B□ type)	2a (-T□, B□ type)	1a, 2a (-P type)		2a	2a		
	Contact type	Double break				Double break	Double break		
	Rated load	Resistive load	100,000 operations min. at 220 VAC, 30 A	100,000 operations min. at 220 VAC, 25 A	100,000 operations min. at 220 VAC, 20 A		30,000 operations min. at 280 VAC, 30 A	100 operations at 1,000 VDC 25 A (standard) 6,000 operations at 600 VDC 25 A (standard) 100 operations at 1,000 VDC 20 A (general purpose) 6,000 operations at 600 VDC 20 A (general purpose)	
		Inductive load COSφ=0.4 L/R=7 ms	100,000 operations min. at 220 VAC, 25 A		100,000 operations min. at 220 VAC, 20 A		30,000 operations min. at 280 VAC, 30 A (COSφ=0.8)	—	
	Max. switching current (A)	30 A	25 A	20 A		30 A	25 A (standard), 20 A (general purpose)		
	Failure rate (mA) P level (reference value)	5 VDC 100 mA				5 VDC 100 mA	5 VDC 100 mA		
Coil	Rated voltage	6 to 100 VDC, 12 to 200/240 VAC				12 VDC, 24 VDC	12 VDC, 24 VDC		
	Rated power consumption	DC: Approx. 1.9 W, AC: Approx. 1.7 to 2.5 VA				2.3 W	Approx. 2.3 W		
Mechanical endurance		1,000,000 operations min.				1,000,000 operations min.	1,000,000 operations min.		
Dielectric strength	Between coil and contacts	4,000 VAC (Impulse withstand voltage: 10 kV)				4,000 VAC	4,000 VAC (Impulse withstand voltage: 10 kV)		
	Between contacts of different polarity	—	2,000 VAC			2,000 VAC	2,000 VAC		
	Between contacts of the same polarity	2,000 VAC				2,000 VAC	2,000 VAC		
	Between set/reset coil	—				—	—		
Ambient operating temperature		-25°C to 60°C				-25°C to 85°C	-40°C to 85°C		
Functions	2-coil latching relay	—				—	—		
	1-coil latching relay	—				—	—		
	Other	Test button (excluding P type)				—	—		
	Enclosure rating	Enclosed	●	—		●	—		
Terminal	Flux protection	—				—	●		
	Sealed	—				—	—		
	PCB terminal	—		●		●	●		
	Surface-mounting Terminals	—				—	—		
Approved standards		UL, CSA, EN (TUV certification)				UL, VDE	UL, EN/IEC (VDE certification)		
Minimum packing unit		20 pcs/tray				20 pcs/tray	20 pcs/tray		
Weight		Approx. 90 g (tab terminal), approx. 120 g (screw terminal), approx. 100 g (PCB terminal)				Approx. 100 g	Approx. 100 g		
PCB diagram	(Unit: mm)								
	Terminal array diagram/ internal connection diagram	 (BOTTOM VIEW)		 (BOTTOM VIEW)		 (BOTTOM VIEW)		 (BOTTOM VIEW)	

# Applications

## For many devices and applications in every field

From household use to public infrastructure, these products can be used in every field and for all purposes with many variations.

### Signal Relay

You can use single relays in the following devices for system switching, signal switching, and more.

#### Communication equipment


Telephone switchboard, PBX<sup>\*1</sup>, fax machines  
IP telephones, various modems  
Network devices (switches, routers, etc.)

Applications: system switching,  
dial pulse transmission

\*1.Private Branch exchange



Network device



PBX, switching equipment


#### Broadcasting and video equipment

Broadcasting equipment  
Satellite broadcasting receivers

Applications: redundancy switching,  
system switching



Broadcasting equipment



Satellite broadcasting device

#### Wireless devices

Various wireless devices,  
GPS<sup>\*2</sup> devices, etc.

Applications: system switching  
\*2.Global Positioning System




Wireless device

#### Medical and health-related equipment

Ultrasonic echography equipment,  
various treatment devices  
Various health and beauty devices

Applications: sensor switching,  
system switching




Ultrasonic echography equipment

#### Testing and measurement equipment

Various oscilloscope measurement devices  
Various IC tester inspection equipment

Applications: input/output switching,  
power switching, etc.



ATE (Automated Test Equipment)



Oscilloscope

#### Entertainment devices

Game machines, peripheral equipment, etc.

Applications: information output



Game machine

#### Security devices

Gas detectors and other disaster prevention devices  
Alarm systems and other crime prevention devices

Applications: alarm output



Detector



Control panel

#### Industrial equipment

Machine tools, molding machines, welding machines  
Mounters and other industrial robots

Applications: system switching, control switching



Machine tool

#### Other devices

OA devices, AV devices, electric appliances

Applications: system switching, etc.



Multimedia



Multifunction machine

# Applications


## Power Relay

Can be used in a wide range of fields where power relays directly switch the loads, such as in motors, lamps, heaters, etc.

### Industrial equipment

**Machine tools, molding machines, welding machines, mounters and other industrial robots**

Applications: control of motors, heaters, etc.



Machine tool



Robot


### Household appliances

**Shutter doors, lights**

Applications: control of motors, lighting, etc.



Automatic shutter door



Lights

### Power equipment

**UPS, switching power**

Applications: power control



UPS



Switching power

### Household devices

**Air conditioners, washing machines, refrigerators, etc.**

Applications: control of compressors, pumps, motors, heaters, etc.



Air conditioner



Washing machine



Refrigerator

### FA equipment

**PLC, temperature regulators, timers, various I/O devices**

Applications: control external device load



PLC



Temperature regulator



Timer



Various I/O devices

Please check each region's Terms & Conditions by region website.

---

**OMRON Corporation**  
Electronic and Mechanical Components Company

**Regional Contact**

**Americas**

<https://www.components.omron.com/>

**Asia-Pacific**

<https://ecb.omron.com.sg/>

**Korea**

<https://www.omron-ecb.co.kr/>

**Europe**

<http://components.omron.eu/>

**China**

<https://www.ecb.omron.com.cn/>

**Japan**

<https://www.omron.co.jp/ecb/>